




# PM60LR400

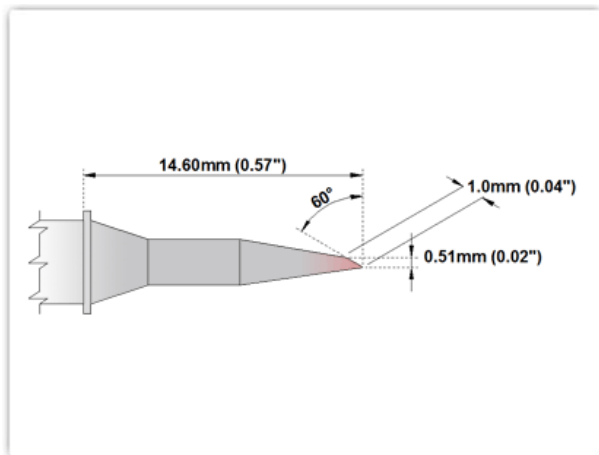

## PM60LR400

**ESD  
FREE**    **LEAD  
FREE**

**Bevel 60° Long Reach 1.0mm (0.04")**

- ▶ Tip Style: Bevel 60°
- ▶ Tip Width: 1.00mm (0.04")
- ▶ Tip Length: 14.60mm (0.57")

## DESCRIPTION

Based on Curie Heat Technology, P Series Tips respond to the thermal demands of each solder joint instantaneously, provide excellent heat transfer and excellent durability. 60 Series tips are designed for temperature sensitive soldering applications.

## SPECIFICATIONS

60 Type Cartridge <sup>1</sup> :	325°C - 358°C
RoHS Compliant <sup>2</sup> / Lead Free:	YES
Equivalent to:	STP-BVL10
For Use With:	TMT-1000S-P, TMT-2000S-PM, TMT-2200S-2PM, MFR Systems (MFR-PS1100, MFR-PS2200, MFR-PS1K, MFR-PS2K)

## MATERIAL COMPOSITION



*All components are RoHS compliant and Lead-Free.*

<sup>1</sup> Thermaltronics tip cartridges will typically idle within a temperature range of +/-1.1°C. However, there is variation in idle temperature across tip geometries within an individual temperature series. Thermaltronics offers a wide variety of tip geometries from 0.10mm fine point tip to 30mm blade tips. The length and geometry of a tip will have an influence on the tip idle temperature. To accurately measure idle temperature it will depend greatly on the measurement method, technique and equipment used. Two different methods or the use of alternative equipment will produce different test results.

<sup>2</sup> Please refer to European Commission for details on RoHS Compliance.